

TERRA FLOORS Luxury Vinyl Flooring-The world-class vinyl flooring is a quality product from **TERRA FLOORS**. We are the largest manufacturer & exporter of PVC floor coverings, film, sheeting and artificial leather. We manufacture a wide range of vinyl flooring in state-of-the-art plant & machinery equipped with latest technology and optimum quality control. **TERRA FLOORS** Luxury Vinyl Flooring has a wide sales distribution network across India.

TERRA FLOORS is the latest collection of PVC wooden planks. The shades and designs are carefully chosen to complement the natural wood. Manufactured with multi-layer technology, this premium flooring is highly suitable to handle heavy footfalls. The PUR protection layer ensures trouble free performance and enhance durability. It reduces the noise impact is trendy, quick to install easy to use and maintenance free. Finally, **TERRA FLOORS** is termite resistant, moisture resistant & fire resistant. **TERRA FLOORS** planks are recommended for hotels, stores, malls, cafeteria, schools, banks, homes, offices etc.

Performance Characteristics

Characteristics	Test Method	Result
Type of Flooring	EN 649	Resilient Flooring
Overall Thickness		1.5mm, 2mm 914.4 x 1524mm (36"x6")
Dimensional Stability	EN 434	<0.25mm
Residual Indentation	EN 433	<0.10mm
Flexbaty	EN 435	No Cracking using 20 mm Mandrel
Color Fastness	ISO 105 802	Class 6
Fire Rating	EN 13501-1	Bfl-S1
Horizontal & Vertical Burning Test	IS 15061-2002	Pass (Ara)
Performance Classification	EN 685	31/32
Abrasion Resistance	EN: 660-2	Wear Group P
Sound Absorption	ISO-140-8/EN ISO 717-2	LW-40
Sip Resistance	DIN 51130	-
Bearing Castor Chair	EN 425	Suitable/Continuous Use
Surface Protection	PUR	Pur
Parlam		Wood and Classic



Recommendation for Installation
TERRA FLOORS Luxury Vinyl Flooring must be allowed to relax for 24 hours in room temperature between 18°C and 27°C prior to installation. Vinyl planks are suitable for laying on any surface such as concrete, steel wooden floors etc provided the sub-floor is even, hard and dry. Damp floors should be dried before the commencement of laying before installation, the base floor must be thoroughly clean, dry and free from grease & grit. **TERRA FLOORS** Luxury Vinyl flooring recommends use of Fevicol SR 996, Fevicol SR 505 or any other equivalent rubber acrylic/water based adhesive of similar type.

Maintenance Do's:
After laying of flooring, the surface should be cleaned daily with damp mop and weekly or fortnightly with soap solution. Prevent point load indentation by covering your furniture legs with rubber stopper caps. To remove stubborn stains, rub the affected area immediately with a soft cloth brush or the steel wool soaked in a warm soapy solution. Scuff marks on the floor can be removed with little application of diesel. Use door mat or suitable mats to minimize accumulation of dust on **TERRA FLOORS** Luxury Vinyl Flooring. Use swater to remove any chemical spill on flooring.


Don'ts:
Do not use any strong detergent, harsh clearing agent or dry steel wool. Throwing of lights cigarette bulls or match sticks on the floor should be avoided as it could lead to burn marks on the floor. Do not drag any heavy chject or furniture on the flooring to avoid scratches on the floor.

Terra

FLOORS



Colors shown in the catalogue may differ from those in actual production, such variations are allowed and considered standard practice.

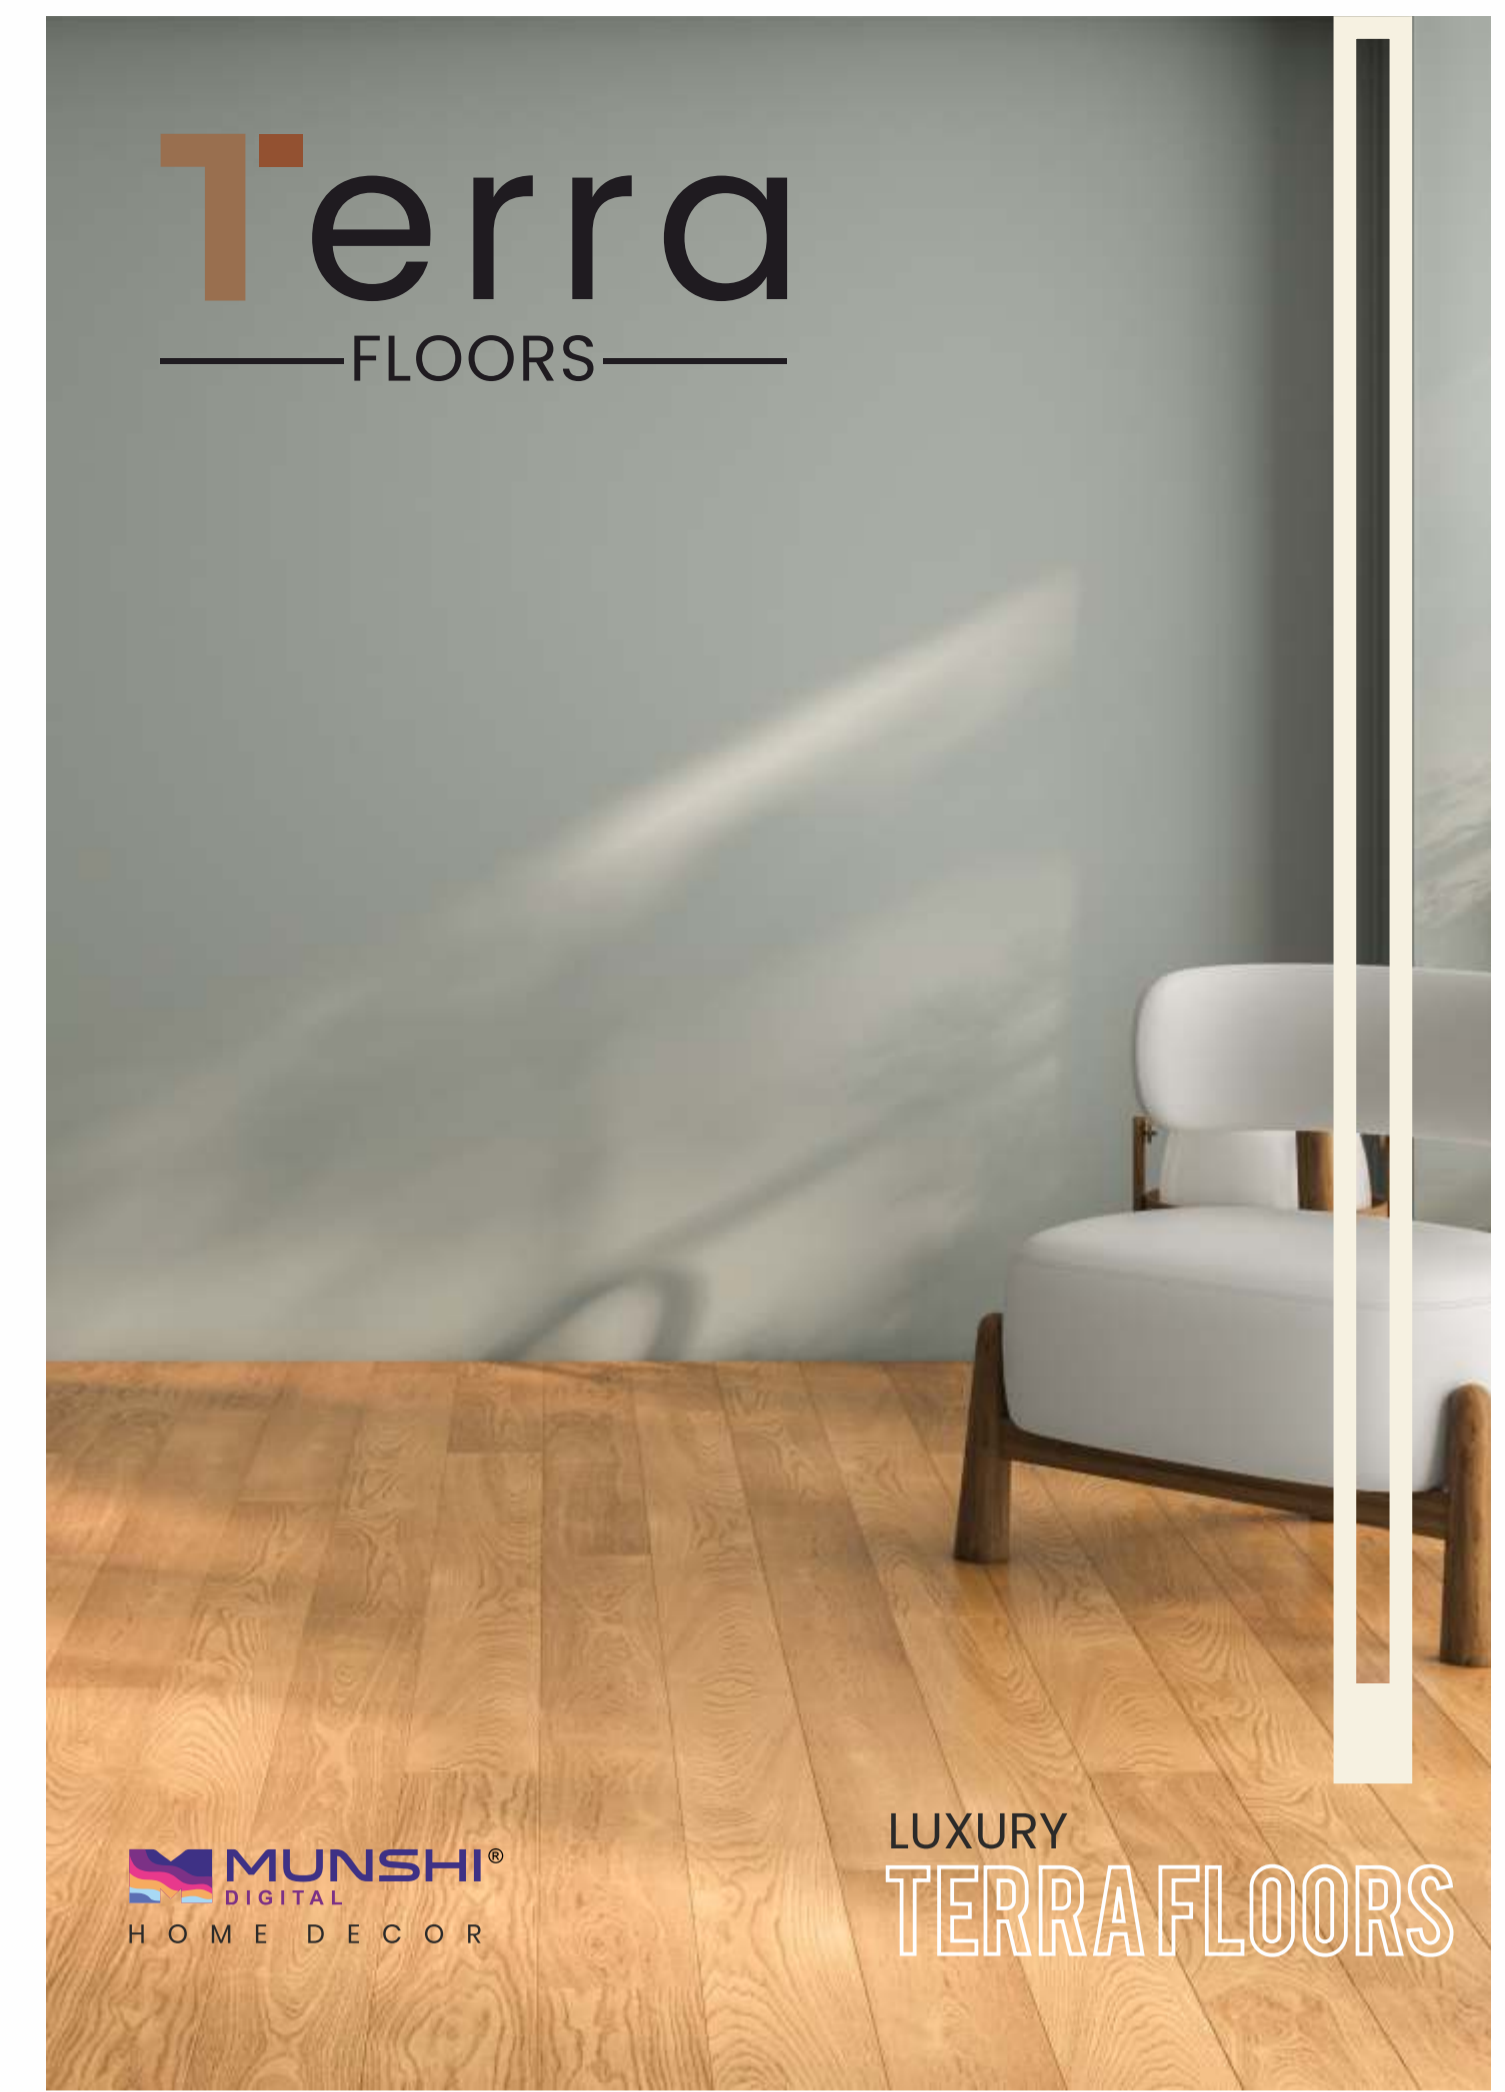

Terra

FLOORS

EMBER PREMIUM
SIZE: 6" X 36" / 1.5 mm



TF 2001



TF 2002



TF 2003




TF 2004



TF 2005



TF 2006

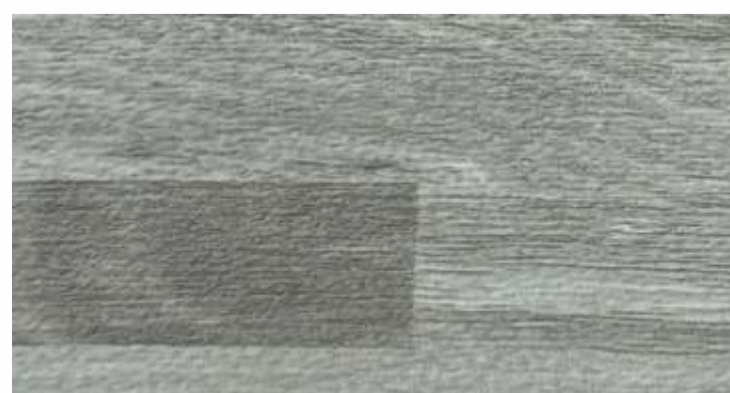

TF 2007



TF 2008

Terra

FLOORS

EMBER PREMIUM
SIZE: 6" X 36" / 1.5 mm



TF 2009



TF 2010



TF 2011



TF 2012

Terra

FLOORS

VALOR PREMIUM
SIZE: 6" X 36" / 2 mm



TF 2051



TF 2052



TF 2053



TF 2054



TF 2055



TF 2056



TF 2057



TF 2058